



TEJIDOS FABRICS

TEMPORADA **2023** SEASON

supratex

Colecciones de tejido para enrollable: colores y características técnicas

Fabric collections for roller blinds: colours and technical data



COLECCIONES

COLLECTIONS

PAG.

SCREEN ESSENTIAL

TOUCH 5%	4
TOUCH 1%	6
BASIC 5%	7
BASIC 1%	8

SCREEN PREMIUM

DENIM 5%	10
ONE SCREEN 1%	11
GLASS 5%	12
SUPREME 3%	13
AROME 5%	14

OPACOS OPAQUE

BLACKOUT	16
DARK M1	17
SCREEN BLACKOUT	18
ANDALUCÍA	19
DURANGO	20

TRANSLUCIDOS TRANSLUCENT

MÁLAGA	23
MIAMI ORIGINAL	25
GALICIA	28
SHANTUNG ORIGINAL	29

NOCHE&DÍA NIGHT&DAY

STRIPES	32
STRIPES WOOD	34
NEVAFLEX ALUM	36
NEVAFLEX BLACKOUT PLAIN	37
NEVAFLEX BLACKOUT MADERA	38

VENTEX


VENTEX	40
VENTEX WOOD	41



SCREEN ESSENTIAL



blanco
white
250-5% **12231401**
300-5% **12258401**

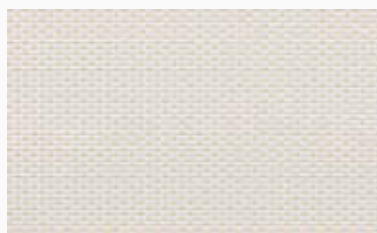

crema (blanco/beige)
cream (white/beige)
250-5% **12231402**
300-5% **12258402**



beige
beige
250-5% **12231448**
300-5% **12258448**



camel
camel
250-5% **12231415**
300-5% **12258415**




blanco/gris
white grey
250-5% **12231403**
300-5% **12258403**



gris medio
mid grey
250-5% **12231414**
300-5% **12258414**



gris oscuro
dark grey
250-5% **12231406**
300-5% **12258406**

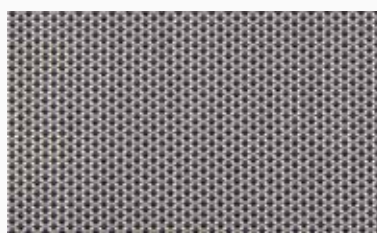


grafito (gris oscuro/negro)
graphite (dark grey/black)
250-5% **12231405**
300-5% **12258405**



negro
black
250-5% **12231407**
300-5% **12258407**



chocolate
chocolate
300-5% **12258408**

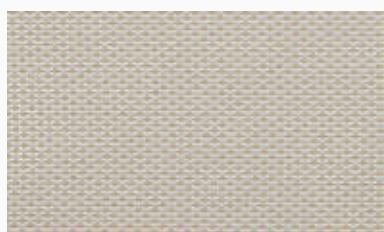

melocotón
peach
300-5% **12258421**



cappuccino
cappuccino
300-5% **12258443**



azul
blue
300-5% **12258425**


TOUCH 5%




Características técnicas Technical characteristic Caractéristiques technique Caratteristiche tecniche Características técnicas خصائص / تقنية

	Peso / Weight / Poids / Peso / وزن	405 g/m² ± 5 %
	Ancho / Width / Largeur Largura / Larghezza / عرض	250 - 300 cm ver muestras
	Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة	0,58 mm ± 5 %
	Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	27 m ± 5 %
	Composición / Composition / Composition Composição / Composizione / التركيبة	70% PVC 30% polyester
	Resistente al fuego / Fire resistance Résistance au feu / Resistência ao fogo Resistente al fuoco / مقاوم النار	FR NFPA701(USA) M1 - CLASE I UNE-EN 13773:2003
	Factor de Apertura / Openness Factor Facteur d'ouverture / Fator de Abertura Fattore di apertura / عامل الانفتاح	5%
	Urdimbre / Warp / Chaîne / Urdidura / Ordito Trama / Weft / Trame / Trama / Trama	48 48

	Medio ambiente / Environnement Environnement / Medio ambiente Ambiente / بيئة	OEKO-TEX 100
	Imprimible / Printable / Imprimable Imprimível / Stampabile	HP Latex printer tested
	Resistencia a la luz / Light fastness Résistance à la lumière / Resistência à luz مقاومة الضوء / مقاومة الضوء	AATCC 16-2003 Class 4.5 After 80 AFU
	UV-A Factor UV-B Factor	93,59 % 95,28 %
	Resistencia a la tensión Tensile strength Résistance à la traction Resistência à tração Resistenza alla trazione قوة الشد	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama 329 daN/5 cm 410 daN/5 cm
	Reflexión solar (Rs) Transmisión solar (Ts) Transmisión de la luz (Tv) Solar reflection (Rs) Solar transmission (Ts) Light transmission (Tv) Réflexion solaire (Rs) Transmission solaire (Ts) Trans, lumineuse (Tv) Reflexão solar (Rs) Transmissão solar (Ts) Transmissão de luz (Tv) Riflessione solare (Rs) Trasmissione solare (Ts) Trasmissione della luce (Tv) الانعكاس الشمسي (Rs) النقل الشمسي (Ts) انتقال الضوء (Tv)	Col. claros Light colours Couleurs claires Cores claras Colori chiari الألوان الفاتحة Col. oscuros Dark colours Couleurs foncées Cores escuras Colori scuri الألوان الداكنة Rs: 50-55% Ts: 15-20% Tv: 13-20% Rs: 06-30% Ts: 07-14% Tv: 09-15%

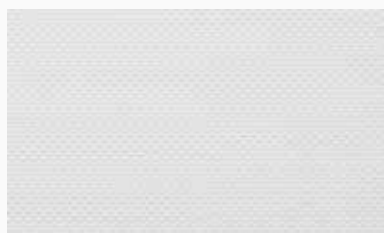

blanco
white
250-1% **12206401**
300-1% **12214401**

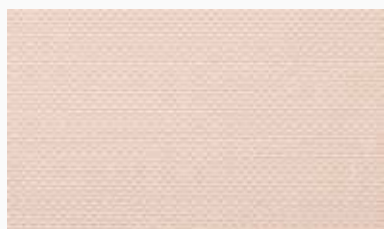

beige
beige
250-1% **12206448**
300-1% **12214448**



blanco-gris
white grey
250-1% **12206403**
300-1% **12214403**




gris oscuro
dark gray
300-1% **12214406**



negro
black
300-1% **12214407**




crema
cream
250-1% **12206402**
300-1% **12214402**

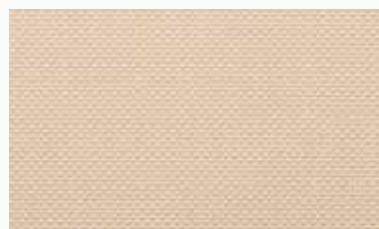

camel
camel
250-1% **12206415**
300-1% **12214415**



gris medio
medium gray
300-1% **12214414**

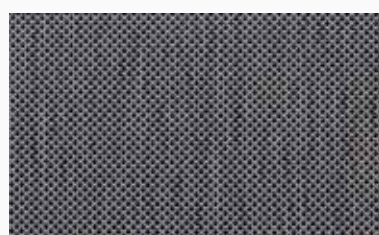


grafito
graphite
300-1% **12214405**


	Características técnicas	Technical characteristic	Caractéristiques technique
	Caratteristiche tecniche	Características técnicas	خصائص تقنية

	Peso / Weight / Poids / Peso / وزن	460 g/m ² ±5 %
	Ancho / Width / Largeur Largura / Larghezza / عرض	250 - 300 cm ver muestras
	Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة	0,58 mm ±5 %
	Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	27 m ±5 %
	Composición / Composition / Composition Composição / Composizione / التركيبة	70% PVC 30% polyester
	Resistente al fuego / Fire resistance Résistance au feu / Resistência ao fogo Resistente al fuoco / مقاوم النار	FR NFPA701(USA) M1 - CLASE 1 UNE-EN 13773:2003
	Factor de Apertura / Openness Factor Facteur d'ouverture / Fator de Abertura Fattore di apertura / عامل الانفتاح	1%
	Urdimbre / Warp / Chaîne / Urdidura / Ordito Trama / Weft / Trame / Trama / Trama	48 48


	Medio ambiente / Environment Environnement / Medio ambiente Ambiente / بيئة	OEKO-TEX 100
	Imprimible / Printable / Imprimabile Imprimível / Stampabile	HP Latex printer tested
	Resistencia a la luz / Light fastness Résistance à la lumière / Resistência à luz Resistenza alla luce / مقاومة الضوء	AATCC 16-2003 Class 4.5 After 80 AFU
	UV-A Factor UV-B Factor	93,59 % 95,28 %
	Resistencia a la tensión Tensile strength Résistance à la traction Resistência à tração Resistenza alla trazione قوة الشد	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama
	Reflexión solar (Rs) Transmisión solar (Ts) Transmisión de la luz (Tv) Solar reflection (Rs) Solar transmission (Ts) Light transmission (Tv) Réflexion solaire (Rs) Transmission solaire (Ts) Trans, lumineuse (Tv) Reflexão solar (Rs) Transmissão solar (Ts) Transmissão de luz (Tv) Riflessione solare (Rs) Trasmissione solare (Ts) Trasmissione della luce (Tv) الانعكاس الشمسي (Rs) النقل الشمسي (Ts) انتقال الضوء (Tv)	Col. claros Light colours Couleurs claires Cores claras Colori chiari الألوان الفاتحة Col. oscuros Dark colours Couleurs foncées Cores escuras Colori scuri الألوان الداكنة Rs: 50-55% Ts: 15-20% Tv: 13-20% Rs: 06-30% Ts: 07-14% Tv: 09-15%

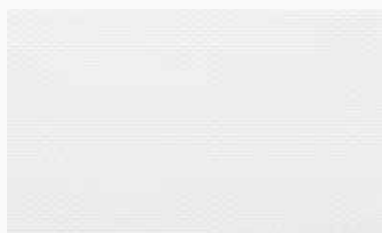

blanco
white
200-5% **12350916**
250-5% **12351916**
300-5% **12352916**

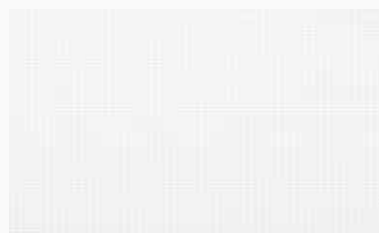

blanco puro
pure white
200-5% **12350910**
250-5% **12351910**
300-5% **12352910**

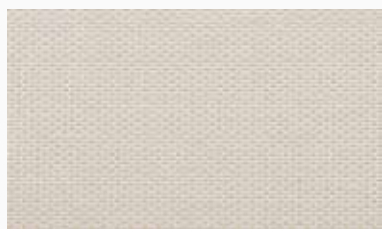


blanco/lino
white/linen
200-5% **12350991**
250-5% **12351991**
300-5% **12352991**




beige
beige
200-5% **12350115**
250-5% **12351115**
300-5% **12352115**




blanco/gris
white/grey
200-5% **12350992**
250-5% **12351992**
300-5% **12352992**

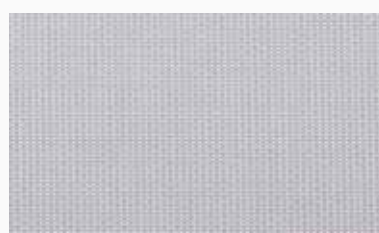

gris medio
medium grey
200-5% **12350740**
250-5% **12351740**
300-5% **12352740**

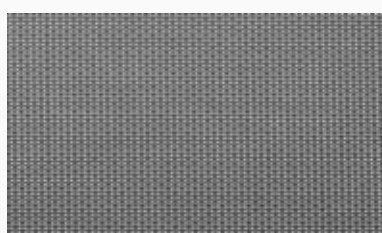


gris oscuro
dark grey
300-5% **12352743**

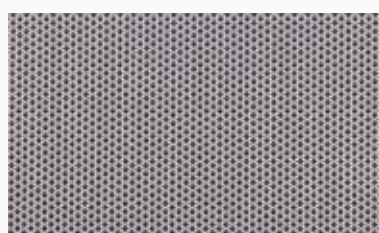

grafito (gris oscuro-negro)
graphite (dark grey-black)
200-5% **12350715**
250-5% **12351715**
300-5% **12352715**




negro
black
200-5% **12350911**
250-5% **12351911**
300-5% **12352911**

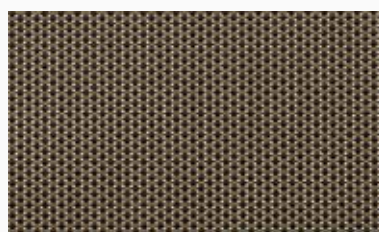

cappuccino
cappuccino
300-5% **12352706**

Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecnici	Características técnicas	خصائص تقنية
 Peso / Weight / Poids / Peso / وزن	410 g/m² ± 10 %		 Urdimbre / Warp / Chaîne / Urdidura / Ordito	48	
 Ancho / Width / Largeur Largura / Larghezza / عرض	200-250-300 cm Ver muestras		Trama / Weft / Trame / Trama / Trama	46	
 Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة	0,55 mm ± 0,05		 Resistencia a la tensión Tensile strength Résistance à la traction Resistência à tração Resistenza alla trazione قوة الشد	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama	160 daN/5 cm 150 daN/5 cm DIN53354:1981
 Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	30 m ± 5 %		 Resistencia al rasgado Tearing strength Résistance à la déchirure Resistência ao rasgamento Resistenza allo strappo مقاومة التمزق	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama	34,6 daN 30,4 daN DIN53363:2003
 Composición / Composition / Composition Composição / Composizione / التركيبة	70% PVC 30% polyester		 Medio ambiente / Environment Environnement / Medio ambiente Ambiente / بيئة		OEKO-TEX 100 GREENGUARD
 Resistente al fuego / Fire resistance Résistance au feu / Resistência ao fogo Resistente al fuoco / مقاوم النار	FR NFPA701(USA) M1 - CLASE 1 UNE-EN 13773:2003		 Resistencia del color / Colour fastness Résistance de la couleur / Resistência da cor Resistenza del colore / ثبات اللون		8 grade Escala de azules Scale of blue SGS
 Factor de Apertura / Openness Factor Facteur d'ouverture / Fator de Abertura Fattore di apertura / عامل الانفتاح	5%		 UV-A Factor		95 %
 Antibacteriano / Antibacterial Antibactérien / Antibacteriano antibatterico / مضاد للجراثيم	R 2,71 (E. COLI) R 3,67 (S. AUREUS) > 2 = antibacterial ISO 22196:2011				

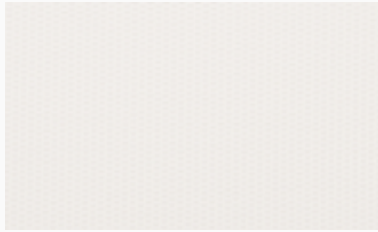

blanco
white
200-1% **12359916**
250-1% **12360916**
300-1% **12361916**



blanco puro
pure white
200-1% **12359910**
250-1% **12360910**
300-1% **12361910**




blanco/lino
white/linen
200-1% **12359991**
250-1% **12360991**
300-1% **12361991**



beige
beige
200-1% **12359115**
250-1% **12360115**
300-1% **12361115**



blanco/gris
white/grey
200-1% **12359992**
250-1% **12360992**
300-1% **12361992**

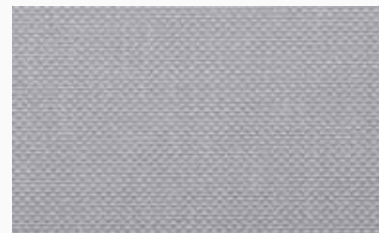

gris medio
medium gray
200-1% **12359740**
250-1% **12360740**
300-1% **12361740**



gris oscuro
dark gray
300-1% **12361743**



grafito
graphite
200-1% **12359715**
250-1% **12360715**
300-1% **12361715**



negro
black
200-1% **12359911**
250-1% **12360911**
300-1% **12361911**




chocolate
chocolate
200-1% **12359713**
250-1% **12360713**
300-1% **12361713**

Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecniche	Características técnicas	خصائص تقنية
 Peso / Weight / Poids / Peso / وزن	470 g/m² ±10 %		 Urdimbre / Warp / Chaîne / Urdidura / Ordito	64	
 Ancho / Width / Largeur Largura / Larghezza / عرض	200-250-300 cm Ver muestras		Trama / Weft / Trame / Trama / Trama	40	
 Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة	0,75 mm ±5 %		 Resistencia a la tensión Tensile strength Résistance à la traction Resistência ao tração Resistenza alla trazione قوة الشد	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama	206 daN/5 cm 150 daN/5 cm DIN53354:1981
 Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	30 m ±5 %		 Resistencia al rasgado Tearing strength Résistance à la déchirure Resistência ao rasgamento Resistenza allo strappo مقاومة التمزق	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama	34,6 daN 30,4 daN DIN53363:2003
 Composición / Composition / Composition Composição / Composizione / التركيبة	70% PVC 30% polyester		 Medio ambiente / Environment Environnement / Medio ambiente Ambiente / بيئة		OEKO-TEX 100 GREENGUARD
 Resistente al fuego / Fire resistance Résistance au feu / Resistência ao fogo Resistente al fuoco / مقاوم النار	FR NFPA701(USA) M1 - CLASE 1 UNE-EN 13773:2003		 Resistencia del color / Colour fastness Résistance de la couleur / Resistência da cor Resistenza del colore / ثبات اللون		8 grade Escala de azules Scale of blue SGS
 Factor de Apertura / Openness Factor Facteur d'ouverture / Fator de Abertura Fattore di apertura / عامل الانفتاح	1%		 UV-A Factor		95 %
 Antibacteriano / Antibacterial Antibactérien / Antibacteriano antibatterico / مضاد للجراثيم	R 2,71 (E. COLI) R 3,67 (S. AUREUS) > 2 = antibacterial ISO 22196:2011				



SCREEN PREMIUM

DENIM 5%

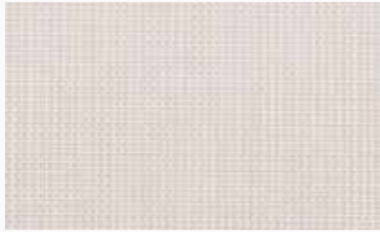

marfil
ivory
300-5% **12353113**



marrón
brown
300-5% **12353825**



chocolate
chocolate
300-5% **12353814**



gris claro
light grey
300-5% **12353747**




gris medio
medium gray
300-5% **12353740**




gris oscuro
dark gray
300-5% **12353746**

Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecniche	Características técnicas	خصائص تقنية
Peso / Weight / Poids / Peso / وزن	428 g/m² ±5 %			Medio ambiente / Environment Environnement / Medio ambiente Ambiente / بيئة	OEKO-TEX 100 GREENGUARD
Ancho / Width / Largeur Largura / Larghezza / عرض	300 cm			Resistencia a la tensión Tensile strength Résistance à la traction Resistência à tração Resistenza alla trazione قوة الشد	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama
Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة	0,73 mm ±5 %				160 daN/5 cm 150 daN/5 cm DIN53354:1981
Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	30 m ±5 %			Resistencia a la luz / Light fastness Résistance à la lumière / Resistência à luz Resistenza alla luce / مقاومة الضوء	AATCC 16-2003 Class 4.5 After 80 AFU
Composición / Composition / Composition Composição / Composizione / التركيبة	70% PVC 30% polyester			UV-A Factor	95 %
Resistente al fuego / Fire resistance Résistance au feu / Resistência ao fogo Resistente al fuoco / مقاوم النار				Termosoldable / Thermo welding allowed / Thermoscellable Termosselável / Saldabile / قابل للحام	
Factor de Apertura / Openness Factor Facteur d'ouverture / Fator de Abertura Fattore di apertura / عامل الانفتاح	5%			Limpiar con un trapo húmedo / Wet wipe / Nettoyé avec un chiffon humide Limpe com um pano húmido / Pullire con un panno umido التنظيف باستخدام قطعة قماش مبللة	
Urdimbre / Warp / Chaîne / Urdidura / Ordito Trama / Weft / Trame / Trama / Trama	48 46				

ONE SCREEN 1%

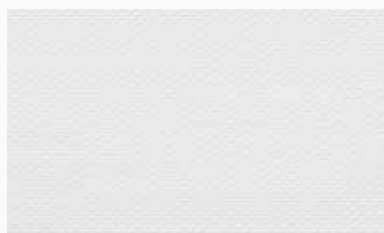

blanco
white
250-1% **12291900**

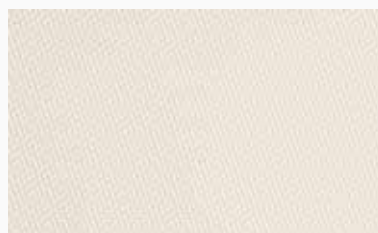

marfil
ivory
250-1% **12291103**




bronce
bronze
250-1% **12291125**



gris
gray
250-1% **12291867**

Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecniche	Características técnicas	خصائص تقنية
 Peso / Weight / Poids / Peso / وزن	500 g/m² ±10 %				
 Ancho / Width / Largeur Largura / Larghezza / عرض	250 cm				
 Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة	0,64 mm ±5 %				
 Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	27,4 m ±5 %				
 Composición / Composition / Composition Composição / Composizione / التركيبة	70% PVC 30% polyester				
 Resistente al fuego / Fire resistance Résistance au feu / Resistência ao fogo Resistente al fuoco / مقاوم النار	FR NFPA701(USA) CLASE 4 UNE-EN 13773:2003				
 Factor de Apertura / Openness Factor Facteur d'ouverture / Fator de Abertura Fattore di apertura / عامل الانفتاح	1%				
		 Resistencia a la tensión Tensile strength Résistance à la traction Resistência à tração Resistenza alla trazione قوة الشد	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama	216 daN/5 cm 103 daN/5 cm DIN53354:1981	
		 Resistencia al rasgado Tearing strength Résistance à la déchirure Resistência ao rasgamento Resistenza allo strappo مقاومة التمزق	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama	27,5 daN 10,8 daN DIN53363:2003	
		 Medio ambiente / Environment Environnement / Medio ambiente Ambiente / بيئة		OEKO-TEX 100	
		 NO termosoldable, cinta refuerzo o costura NO thermo welding, reinforcement tape or seam PAS Thermoscellable, ruban de renfort ou couture NO Termoscelável, fita de reforço ou costura NON saldabile, finforzo o nastro adesivo غير قابل للحام مع تعزيز أو شريط التماس			

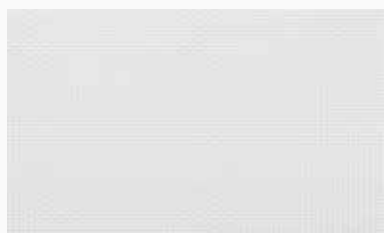


blanco
white
250-5% **12349916**
300-5% **12328916**




beige
beige
250-5% **12349115**
300-5% **12328115**




blanco/gris
white/grey
250-5% **12349747**
300-5% **12328747**

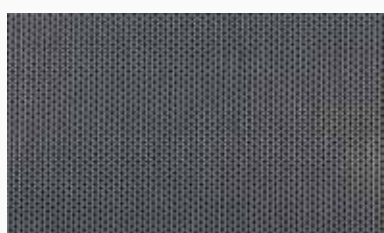

gris oscuro
dark gray
250-5% **12349743**
300-5% **12328743**

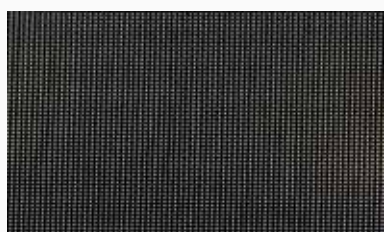

negro
black
250-5% **12349911**
300-5% **12328911**

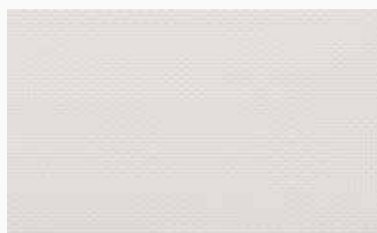


blanco/beige
white/beige
250-5% **12349114**
300-5% **12328114**



chocolate
chocolate
250-5% **12349814**
300-5% **12328814**



gris
gris
250-5% **12349740**
300-5% **12328740**

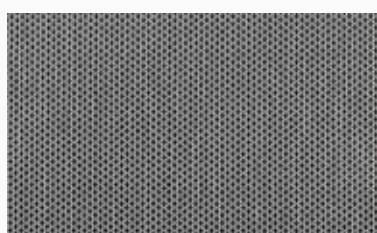

gris/negro
grey/black
250-5% **12349746**
300-5% **12328746**

Características técnicas	Technical characteristic	Caractéristiques technique
Caratteristiche tecniche	Características técnicas	خصائص تقنية
 Peso / Weight / Poids / Peso / وزن		393 g/m² ±5 %
 Ancho / Width / Largeur Largura / Larghezza / عرض		250 - 310 cm ver muestras
 Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة		0,40 mm ±5 %
 Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة		30 m ±5 %
 Composición / Composition / Composition Composição / Composizione / التركيبة		64% PVC 36% fiberglass
 Resistente al fuego / Fire resistance Résistance au feu / Resistência ao fogo Resistente al fuoco / مقاوم النار		FR NFPA701:2010 CLASE 2 UNE-EN 13773:2003 M2 UNE23.727-90 B1 ÖNORM_B_3820
 Factor de Apertura / Openness Factor Facteur d'ouverture / Fator de Abertura Fattore di apertura / عامل الانفتاح		5%
 Medio ambiente / Environment Environnement / Medio ambiente Ambiente / بيئة		OEKO-TEX 100

	Resistencia del color / Colour fastness Résistance de la couleur / Resistência da cor ثبات اللون / Resistenza del colore	7-8 Escala de azules Scale of blue
	Termosoldable / Thermo welding allowed / Thermoscellable Termoselável / Saldabile / قابل للحام	
	Limpiar con agua jabonosa / Clean with soapy water Nettoyer à l'eau savonneuse / Limpe com água e sabão Pulire con acqua saponata / تنظيف بالماء والصابون	
	Resistencia a la tensión Tensile strength Résistance à la traction Resistência à tração Resistenza alla trazione قوة الشد	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama 200 daN/5 cm 220 daN/5 cm
	Resistencia al rasgado Tearing strength Résistance à la déchirure Resistência ao rasgamento Resistenza allo strappo مقاومة التمزق	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama 7,9 daN 8,4 daN DIN53363:2003
	Reflexión solar (Rs) Transmisión solar (Ts) Transmisión de la luz (Tv) Solar reflection (Rs) Solar transmission (Ts) Light transmission (Tv) Réflexion solaire (Rs) Transmission solaire (Ts) Trans, lumineuse (Tv) Reflexão solar (Rs) Transmissão solar (Ts) Transmissão de luz (Tv) Riflessione solare (Rs) Trasmisione solare (Ts) Trasmisione della luce (Tv) الانعكاس الشمسي (Rs) الانتقال الشمسي (Ts) الانتقال الشمسي (Tv)	Col. claros Light colours Couleurs claires Cores claras Colori chiari الألوان الفاتحة Rs: 50-70% Ts: 12-18% Tv: 10-18% Col. oscuros Dark colours Couleurs foncées Cores escuras Colori scuri الألوان الداكنة Rs: 06-30% Ts: 06-10% Tv: 06-09%



blanco
white
300-3% **12257001**



beige
beige
300-3% **12257002**



pardo
brown
300-3% **12257013**



chocolate
chocolate
300-3% **12257508**



gris claro
light grey
300-3% **12257003**



gris medio
medium gray
300-3% **12257012**










negro
black
300-3% **12257507**

Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecnici	Características técnicas	خصائص تقنية
Peso / Weight / Poids / Peso / Peso / وزن	520 g/m² ± 10 %		Resistencia a la tensión Tensile strength Résistance à la traction Resistência à tração Resistenza alla trazione قوة الشد	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama	252 daN/5 cm 228 daN/5 cm DIN53354:1981
Ancho / Width / Largeur Largura / Larghezza / عرض	300 cm		Resistencia al rasgado Tearing strength Résistance à la déchirure Resistência ao rasgamento Resistenza allo strappo مقاومة التمزق	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama	34,6 daN 30,4 daN DIN53363:2003
Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة	0,72 mm ± 0,05		Resistencia a la luz / Light fastness Résistance à la lumière / Resistência à luz Resistenza alla luce / مقاومة الضوء		AATCC 16-2003 Class 4.5 After 80 AFU
Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	27,4 m ± 5 %		UV-B Factor UV-A Factor Ultraviolet Protection Factor		94,9 % 97,2 % UPF 15 AITEK STANDARD 801 2019-AN2034
Composición / Composition / Composition Composição / Composizione / التركيبة	73% PVC 27% polyester				
Resistente al fuego / Fire resistance Résistance au feu / Resistência ao fogo Resistente al fuoco / مقاوم النار	FR NFPA701(USA) M2 NFP92-503 B2 GB 50222-95				
Factor de Apertura / Openness Factor Facteur d'ouverture / Fator de Abertura Fattore di apertura / عامل الانفتاح	3%				
Urdimbre / Warp / Chaîne / Urdidura / Ordito Trama / Weft / Trame / Trama / Trama	36 28				
Soldable con Ultrasonido / Ultrasonic welding allowed / Soudable avec ultrasons / Soldável com ultra-som / Saldabile con ultrasuoni					



Uso en interiores y exteriores
Indoor and outdoor use
Utilisation intérieure et extérieure

Uso indoor e ao ar livre
Uso interno ed esterno

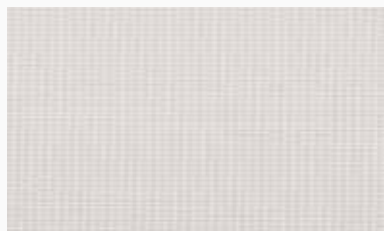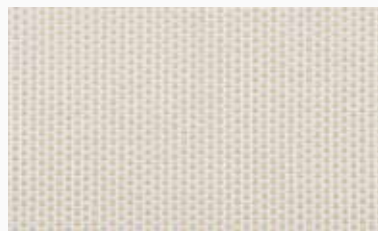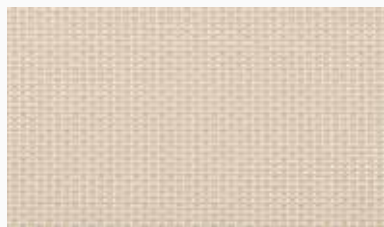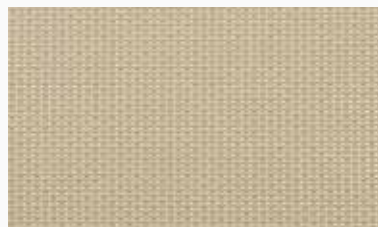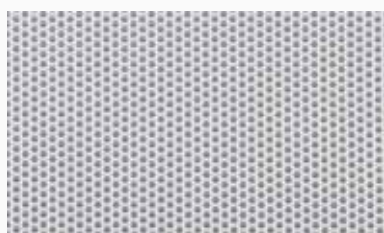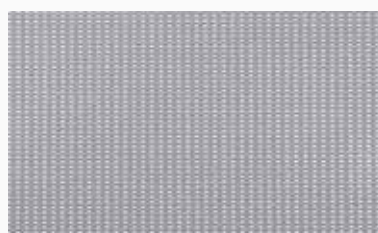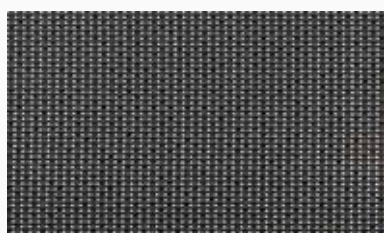blanco
white250-5% **12232501**
300-5% **12260501**crema
cream250-5% **12232502**
300-5% **12260502**camel
camel250-5% **12232548**
300-5% **12260548**beige
beige250-5% **12232515**
300-5% **12260515**blanco/gris
white/grey250-5% **12232503**
300-5% **12260503**gris medio
medium gray300-5% **12260506**negro
black250-5% **12232521**
300-5% **12260521**

Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecniche	Características técnicas	خصائص تقنية
 Peso / Weight / Poids / Peso / وزن	528 g/m² ± 5 %				
 Ancho / Width / Largeur Largura / Larghezza / عرض	250 - 300 cm ver muestras				
 Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة	0,70 mm ± 5 %				
 Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	27,4 m ± 5 %				
 Composición / Composition / Composition Composição / Composizione / التركيبة	70 % PVC 30 % polyester				
 Resistente al fuego / Fire resistance Résistance au feu / Resistência ao fogo Resistente al fuoco / مقاوم النار	FR NFPA701(USA)				
 Factor de Apertura / Openness Factor Facteur d'ouverture / Fator de Abertura Fattore di apertura / عامل الانفتاح	5%				
 Urdimbre / Warp / Chaîne / Urdidura / Ordito Trama / Weft / Trame / Trama / Trama	36 36				
			 Resistencia a la tensión Tensile strength Résistance à la traction Resistência à tração Resistenza alla trazione قوة الشد	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama	419 daN/5 cm 406 daN/5 cm DIN53354:1981
			 Resistencia a la luz / Light fastness Résistance à la lumière / Resistência à luz Resistenza alla luce / مقاومة الضوء		AATCC 16-2003 Class 4.5 After 80 AFU
			 UV-A Factor UV-B Factor		93,59 % 95,28 %

Uso en interiores y exteriores
Indoor and outdoor use
Utilisation intérieure et extérieureUso indoor e ao ar livre
Uso interno ed esterno


OPACOS OPAQUE

BLACKOUT




blanco
white

183 **12212900**
244 **12209900**
300 **12202900**

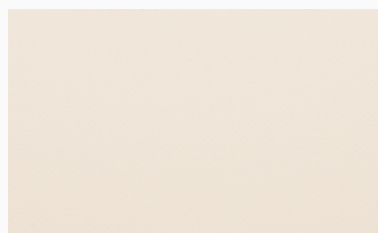


marfil
ivory

183 **12212113**
300 **12202113**

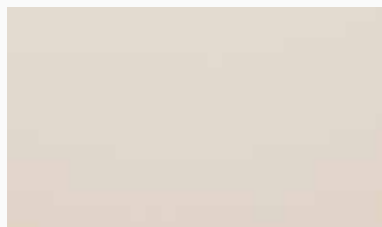


perla
pearl

183 **12212010**
244 **12209010**
300 **12202010**

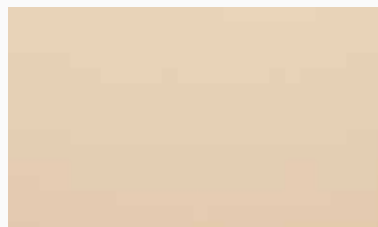


beige
beige

183 **12212938**
244 **12209938**
300 **12202938**

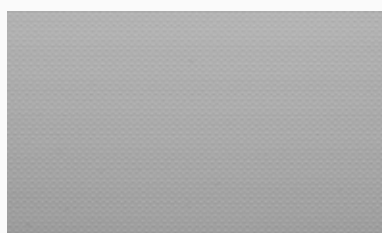

gris
gray

183 **12212868**
244 **12209868**
300 **12202868**

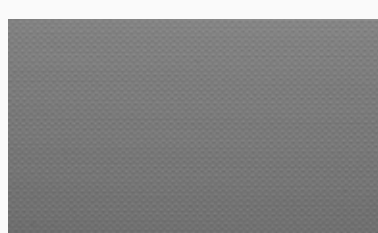

gris oscuro
dark gray


183 **12212743**
244 **12209743**
300 **12202743**

■ Características técnicas Technical characteristic Caractéristiques technique Caratteristiche tecniche Características técnicas خصائص تقنية

	Peso / Weight / Poids / Peso / وزن	537 g/m² ±5 %
	Ancho / Width / Largeur Largura / Larghezza / عرض	183-244-300 cm ver muestras
	Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة	0,29 mm ±5 %
	Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	25 m ±10 %
	Composición / Composition / Composition Composição / Composizione / التركيبة	75 % PVC 25 % fiberglass
	Resistente al fuego / Fire resistance Résistance au feu / Resistência ao fogo Resistente al fuoco / مقاوم النار	FR NFPA701:2010
	Resistencia a la luz / Light fastness Résistance à la lumière / Resistência à luz Resistenza alla luce / مقاومة الضوء	AATCC 16-2003 Class 4.5 After 80 AFU
	Termosoldable / Thermo welding allowed / Thermoscellabile Termoselável / Saldabile / قابل للحام	

	Imprimible / Printable / Imprimabile Imprimível / Stampabile	HP Latex printer tested
	Limpiar con un trapo húmedo / Wet wipe Nettoyer avec un chiffon humide / Limpe com um pano húmido Pulire con un panno umido / تنظيف باستخدام قطعة قماش مبللة	
	Temperaturas mínima y máxima de uso para mantener la estabilidad del producto. Minimum and maximum temperatures of use of the product to maintain its stability. Températures minimale et maximale d'utilisation du produit pour maintenir sa stabilité. Temperaturas mínima e máxima de uso do produto para manter sua estabilidade.	-10 °C + 60 °C
	La no utilización de cristales con protección ultravioleta puede deformar el producto, en mayor medida si están orientados al sur. The non-use of glass with ultraviolet protection can deform the product, especially if they are oriented to the south. La non utilisation de verre avec protection contre les rayons ultraviolets peut déformer le produit, surtout s'ils sont orientés vers le sud. O não uso de vidro com proteção ultravioleta pode deformar o produto, especialmente se forem orientados para o sul.	

DARK M1

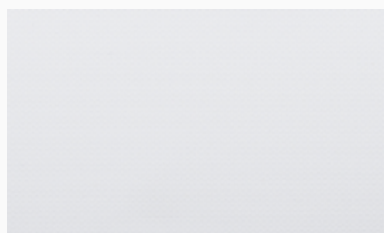

blanco
white

200 **12302900**
250 **12303900**
300 **12320900**



perla
pearl

200 **12302010**
250 **12303010**
300 **12320010**



beige
beige

200 **12302938**
250 **12303938**
300 **12320938**



gris
grey

200 **12302868**
250 **12303868**
300 **12320868**



gris oscuro
dark grey

200 **12302743**
250 **12303743**
300 **12320743**



negro
black

200 **12302964**
250 **12303964**
300 **12320964**

Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecniche	Características técnicas	خصائص تقنية
Peso / Weight / Poids / Peso / وزن	530 g/m² ±5 %				
Ancho / Width / Largeur Largura / Larghezza / عرض	200-250-300 cm ver muestras				
Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة	0,36 mm ±5 %				
Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	30 m ±10 %				
Composición / Composition / Composition Composição / Composizione / التركيبة	60 % PVC 40 % fiberglass				
Resistente al fuego / Fire resistance Résistance au feu / Resistência ao fogo Resistente al fuoco / مقاوم النار	M1 UNE 23.727:1990 Clase 2 EN 13772:03				
			Opacidad / Opacity / Opacité Opacidade / Opacità / غموض	100 %	
			Resistencia a la luz / Light fastness Résistance à la lumière / Resistência à luz Resistenza alla luce / مقاومة الضوء	AATCC 16-2003 Class 4.5 After 80 AFU	
			Termosoldable / Thermo welding allowed / Thermoscellable Termoselável / Saldabile / قابل للحام		
			Limpiar con un trapo húmedo / Wet wipe Nettoyer avec un chiffon humide / Limpe com um pano húmido Pullire con un panno umido / التنظيف باستخدام قطعة قماش مبللة		

SCREEN BLACKOUT



blanco
white
300 **12363916**



blanco/lino : trasera blanca
white/linen : white back
300 **12363991**




blanco/gris : trasera blanca
white/grey : white back
300 **12363992**


■ Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecniche	Características técnicas	خصائص تقنية
Peso / Weight / Poids / Peso / وزن	663 g/m² ±5 %		Urdimbre / Warp / Chaîne / Urdidura / Ordito	48	
Ancho / Width / Largeur Largura / Larghezza / عرض	300 cm		Trama / Weft / Trame / Trama / Trama	46	
Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة	0,84 mm ±5 %		Medio ambiente / Environment Environnement / Medio ambiente Ambiente / بيئة	GREENGUARD	
Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	30 m ±5 %		Retardante de fuego / Fire retardant Retardateur de flamme / Retardante de fogo Ritardante di fiamma / مقاوم النار	Class 5	
Composición / Composition / Composition Composição / Composizione / التركيبة	70 % PVC 30 % polyester		Termosoldable / Thermo welding allowed / Thermoscellable Termoselável / Saldabile / قابل للحام		
Resistencia del color / Colour fastness Résistance de la couleur / Resistência da cor Resistenza del colore / ثبات اللون	8				
Opacidad / Opacity / Opacité Opacidade / Opacità / غموض	100 %				



blanco
white
250 **12204900**

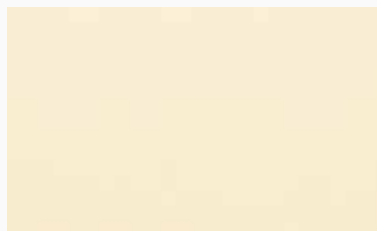

marfil
ivory
250 **12204010 ***

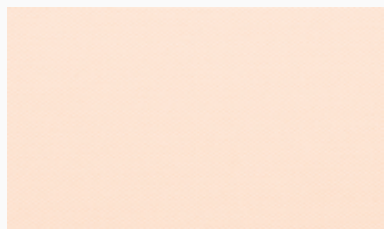


beige
beige
250 **12204938**




marrón
brown
250 **12204825 ***



chocolate
chocolate
250 **12204814 ***

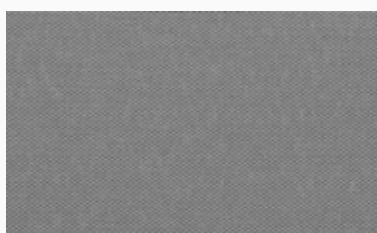


gris
grey
250 **12204743**

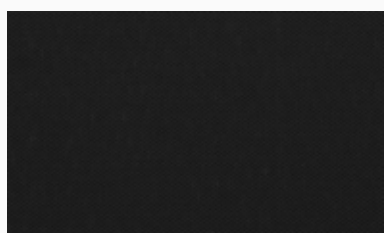


negro
black
250 **12204911**

*** Producto bajo pedido, consultar stock.**
Product on demand, Check availability.


■ Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecniche	Características técnicas	خصائص تقنية
	Peso / Weight / Poids / Peso / وزن	250 g/m ² ±5 %			
	Ancho / Width / Largeur Largura / Larghezza / عرض	250 cm			
	Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	30 m ±10 %			
	Composición / Composition / Composition Composição / Composizione / التركيبة	100 % polyester			
				Opacidad / Opacity / Opacité Opacidade / Opacità / غموض	100 %
				Resistencia del color / Colour fastness Résistance de la couleur / Resistência da cor Resistenza del colore / ثبات اللون	4-5
				Imprimible / Printable / Imprimable Imprimível / Stampabile	HP Latex printer tested front face only

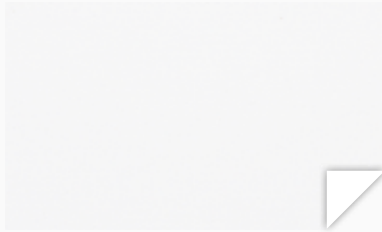


blanco
white
250 **12285001**

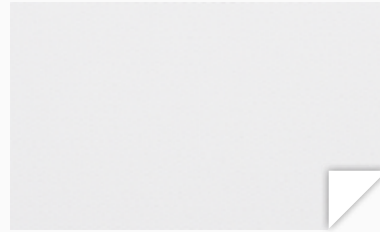

marfil
ivory
250 **12285016**

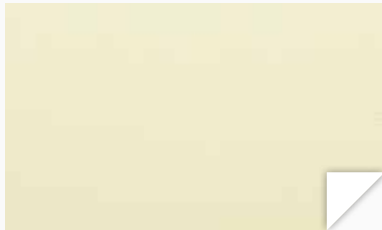

vainilla
vanilla
250 **12285002**

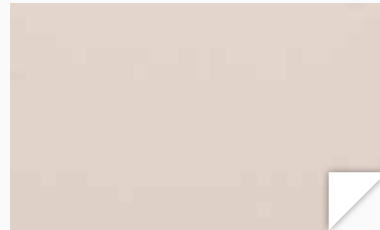

beige
beige
250 **12285003**



melocotón
peach
250 **12285004**



amarillo
yellow
250 **12285005**



verde agua
light green
250 **12285006**



gris
gray
250 **12285007**



rosa
pink
250 **12285008**



azul celeste
sky blue
250 **12285009**



camel
camel
250 **12285010**



naranja
orange
250 **12285011**




rojo
red
250 **12285012**




teja
roof tile
250 **12285013**

DURANGO

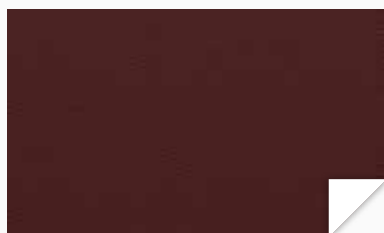

chocolate
chocolate
250 12285014

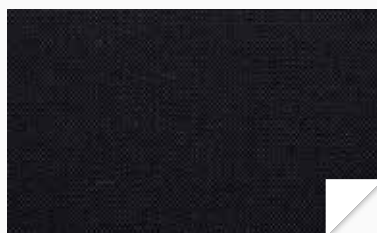


negro
black
250 12285015

■ Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecniche	Características técnicas	خصائص تقنية
	Peso / Weight / Poids / Peso / وزن	370 g/m ² ±5 %			
	Ancho / Width / Largeur Largura / Larghezza / عرض	250 cm			
	Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	35 m ±5 %			
	Composición / Composition / Composition Composição / Composizione / التركيبة	100 % polyester			
	Opacidad / Opacity / Opacité Opacidade / Opacità / غموض	96 %			
	Medio ambiente / Environment Environnement / Medio ambiente Ambiente / بيئة	GREENGUARD			
	Resistente al fuego / Fire resistance Résistance au feu / Resistência ao fogo Resistente al fuoco / مقاوم النار	NO			
	Medio ambiente / Environment Environnement / Medio ambiente Ambiente / بيئة	GREENGUARD			
	Resistente al fuego / Fire resistance Résistance au feu / Resistência ao fogo Resistente al fuoco / مقاوم النار	NO			
	Desviación de trama / Weft deviation Déviation de la trame / Desvio de trama Deviazione della trama / انحراف الإطار	≤ 3 %			
	Solidez a la luz / Light fastness Résistance à la lumière / Solidez à luz Solidità alla luce / ثبات الضوء	5°			
	Solidez a la luz / Light fastness Résistance à la lumière / Solidez à luz Solidità alla luce / ثبات الضوء	5°			

A modern living room with large windows covered by translucent roller shades. The room features a white sofa with teal and grey pillows, a small round wooden table with a potted plant and two green cups, and a patterned rug. The background shows a cityscape through the window. On the right side of the image, there is a vertical decorative bar with yellow, orange, and blue sections.


TRANSLUCIDOS TRANSLUCENT

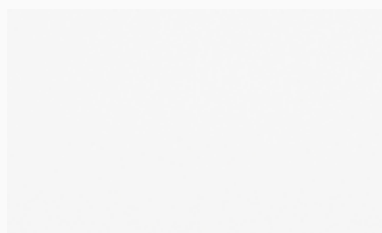


blanco
white
220 **12237230**



pardo
dun
220 **12237231**

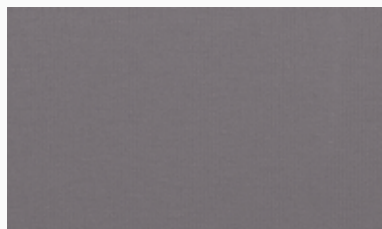

gris medio
medium gray
220 **12237232**

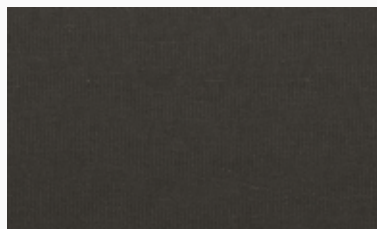

gris oscuro
dark gray
220 **12237233**



crema
cream
220 **12237234**



camel
camel
220 **12237235**



beige
beige
220 **12237236**



amarillo
yellow
220 **12237238**



naranja
orange
220 **12237239**



rojo fuego
red fire
220 **12237240**




rojo vino
red wine
220 **12237241**



turquesa
turquoise
220 **12237244**



celeste
light blue
220 **12237245**

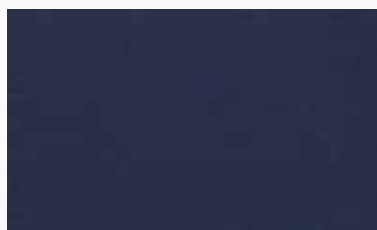

azulmarino
navy blue
220 **12237246**

MÁLAGA




■ **Características técnicas** Technical characteristic Caractéristiques technique Caratteristiche tecniche Características técnicas خصائص تقنية

	Peso / Weight / Poids / Peso / Peso / وزن	220 g/m² ±5 %
	Ancho / Width / Largeur Largura / Larghezza / عرض	220 cm
	Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة	0,37 mm ±5 %
	Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	35 m ±5 %
	Composición / Composition / Composition Composição / Composizione / التركيبة	100 % polyester
	Densidad / Density / Densité Densidade / Densità / كثافة	99 %
	Medio ambiente / Environment Environnement / Medio ambiente Ambiente / بيئة	GREENGUARD Children&Schools


	Medio ambiente / Environment Environnement / Medio ambiente Ambiente / بيئة	GREENGUARD Children&Schools
	Desviación de trama / Weft deviation Déviation de la trame / Desvio de trama Deviazione della trama / انحراف الإطار	≤ 3 %
	Solidez a la luz / Light fastness Résistance à la lumière / Solidez à luz Solidità alla luce / ثبات الضوء	4°
	Imprimible / Printable / Imprimable Imprimível / Stampabile	HP Latex printer tested

MIAMI ORIGINAL

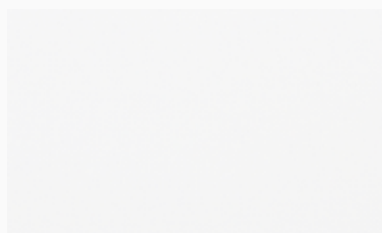

blanco puro
pure white

200 **12229100**
250 **12205100**
127 mm **12831100**
89 mm **12832100**

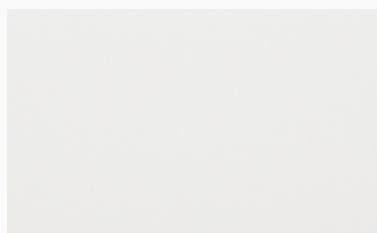

blanco
white

200 **12229001**
250 **12205001**
127 mm **12831001**
89 mm **12832001**




hueso
bone

200 **12229002**
250 **12205002**
127 mm **12831002**
89 mm **12832002**



camel
camel

200 **12229024**
127 mm **12831024**
89 mm **12832024**

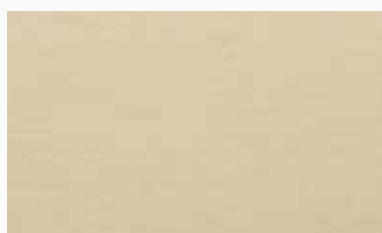

beige
beige

200 **12229021**
127 mm **12831021**
89 mm **12832021**



tierra
ground

200 **12229025**
89 mm **12832025***



ocre
ocher

200 **12229152**
127 mm **12831152**
89 mm **12832152**



mostaza
mustard

200 **12229153**
127 mm **12831153***



marfil
ivory

200 **12229151**



amarillo
yellow

200 **12229015**



manzana
apple

200 **12229064**



verde bosque
green forest

200 **12229063**



verde claro
light green

200 **12229006**
127 mm **12831006***



aguamarina
aquamarine

200 **12229061**
127 mm **12831061***

* **Producto bajo pedido, consultar stock.**
Product on demand, Check availability.

MIAMI ORIGINAL



turquesa
turquoise

200 **12229116**
127 mm **12831116***



malva
mallow

200 **12229013**



rojo
red

200 **12229122**
89 mm **12832122***



coral
coral

200 **12229133**



naranja
orange

200 **12229161**



melocotón
peach

200 **12229016**



marrón
brown

200 **12229023**
127 mm **12831023***
89 mm **12832023**



bronce
bronze

200 **12229003**
127 mm **12831003***
89 mm **12832003***



chocolate
chocolate

200 **12229007**
127 mm **12831007***



ébano
ebony

200 **12229071**
127 mm **12831071***



pardo
dun

200 **12229072**
89 mm **12832072***



plata
silver

200 **12229005**
127 mm **12831005**
89 mm **12832005**



gris
gray

200 **12229051**
250 **12205051**
127 mm **12831051**
89 mm **12832051**



acero
steel

200 **12229052**
127 mm **12831052**
89 mm **12832052**

* Producto bajo pedido, consultar stock.
Product on demand, Check availability.

MIAMI ORIGINAL



lila
lilac
200 **12229111**



celeste
light blue
200 **12229112**
127 mm **12831112***



lavanda
lavender
200 **12229011**
127 mm **12831011***



azul
blue
200 **12229115**



prusia
prussia
200 **12229113**
127 mm **12831113**
89 mm **12832113***



ultramarino
ultramarine
200 **12229114**
127 mm **12831114**
89 mm **12832114***

* **Producto bajo pedido, consultar stock.**
Product on demand, Check availability.

■ Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecniche	Características técnicas	خصائص تقنية
 Peso / Weight / Poids / Peso / وزن	190 g/m² ±5 %				
 Ancho / Width / Largeur Largura / Larghezza / عرض	200-250 cm 127-89 mm ver muestras				
 Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة	0,30 mm ±5 %				
 Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	40 m ±5 %				
 Composición / Composition / Composition Composição / Composizione / التركيبة	100 % polyester				
		 Termosoldable / Thermo welding allowed / Thermoscellable Termoselável / Saldabile / قابل للحام			
		 Limpiar con un trapo húmedo / Wet wipe Nettoyer avec un chiffon humide / Limpe com um pano húmido التنظيف باستخدام قطعة قماش مبللة			
		 Imprimible / Printable / Imprimable Imprimível / Stampabile		HP Latex printer tested	

GALICIA



marfil
ivory
240 **12250010**



blanco
white
240 **12250900**



beige
beige
240 **12250938**


 Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecniche	Características técnicas	خصائص تقنية
 Peso / Weight / Poids / Peso / وزن		160 g/m² ±5 %			
 Ancho / Width / Largeur Largura / Larghezza / عرض		240 cm			
 Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة		0,35 mm ±5 %			
 Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة		30 m ±5 %			
 Composición / Composition / Composition Composição / Composizione / التركيبة		80 % polyester 20 % PVC			

SHANTUNG ORIGINAL




blanco puro
pure white

200 **12249100**
127 mm **12801100**
89 mm **12802100***

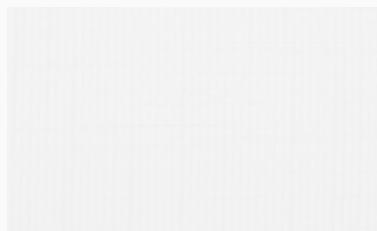


blanco
white

200 **12249001**
127 mm **12801001**

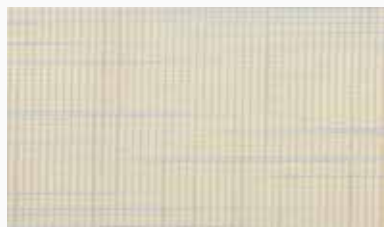

vainilla
vanilla

200 **12249028**
127 mm **12801028**
89 mm **12802028***

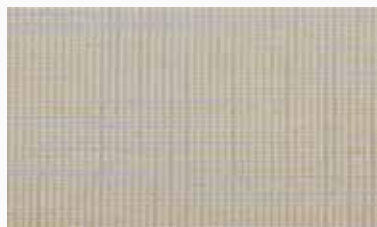

beige
beige

200 **12249021**
127 mm **12801021**
89 mm **12802021***



camel
camel

200 **12249026**
127 mm **12801026**
89 mm **12802026***



arena
sand

200 **12249015**
127 mm **12801015**




ocre
ocher

200 **12249151**



marrón
brown

200 **12249003**
127 mm **12801003**
89 mm **12802003***

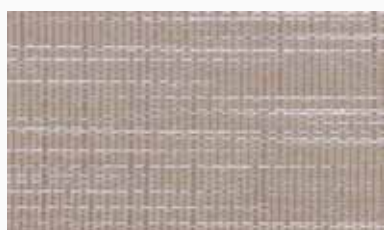

cappuccino
cappuccino

200 **12249004**
127 mm **12801004**
89 mm **12802004***



malva
mallow

200 **12249012**
127 mm **12801012**




celeste
light blue

200 **12249115**
89 mm **12802115***



azul
blue

200 **12249117**
127 mm **12801117**
89 mm **12802117***

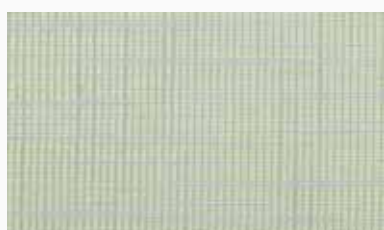

verde claro
light green

200 **12249066**
127 mm **12801066**



verde
green


200 **12249065**
127 mm **12801065**

* **Producto bajo pedido, consultar stock.**
Product on demand, Check availability.

SHANTUNG ORIGINAL



perla
pearl
200 **12249051**
127 mm **12801051**
89 mm **12802051***

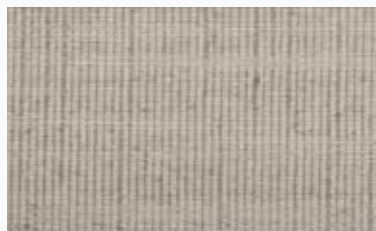

gris
gray
200 **12249005**
127 mm **12801005**
89 mm **12802005***



plomo
lead
200 **12249058**
127 mm **12801058**
89 mm **12802058***

* Producto bajo pedido, consultar stock.
Product on demand, Check availability.



■ Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecniche	Características técnicas	خصائص تقنية
 Peso / Weight / Poids / Peso / وزن	190 g/m² ±5 %				
 Ancho / Width / Largeur Largura / Larghezza / عرض	200 cm 127-89 mm ver muestras				
 Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة	0,40 mm ±5 %				
 Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	40 m ±5 %				
 Composición / Composition / Composition Composição / Composizione / التركيبة	100 % polyester				
			 Termosoldable / Thermo welding allowed / Thermoscellable Termoselável / Saldabile / قابل للحام		
			 Limpiar con un trapo húmedo / Wet wipe Nettoyer avec un chiffon humide / Limpe com um pano húmido التنظيف باستخدام قطعة قماش مبللة / Pullire con un panno umido		

A modern interior space featuring large windows with horizontal blinds. The blinds are partially open, allowing natural light to filter into the room. In the foreground, there are two contemporary armchairs with a curved design and a glass coffee table. The background shows a view of a green landscape through the windows. The overall atmosphere is bright and airy.

NOCHE&DÍA

NIGHT&DAY

STRIPES

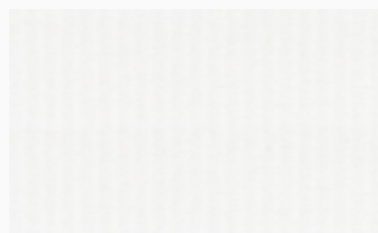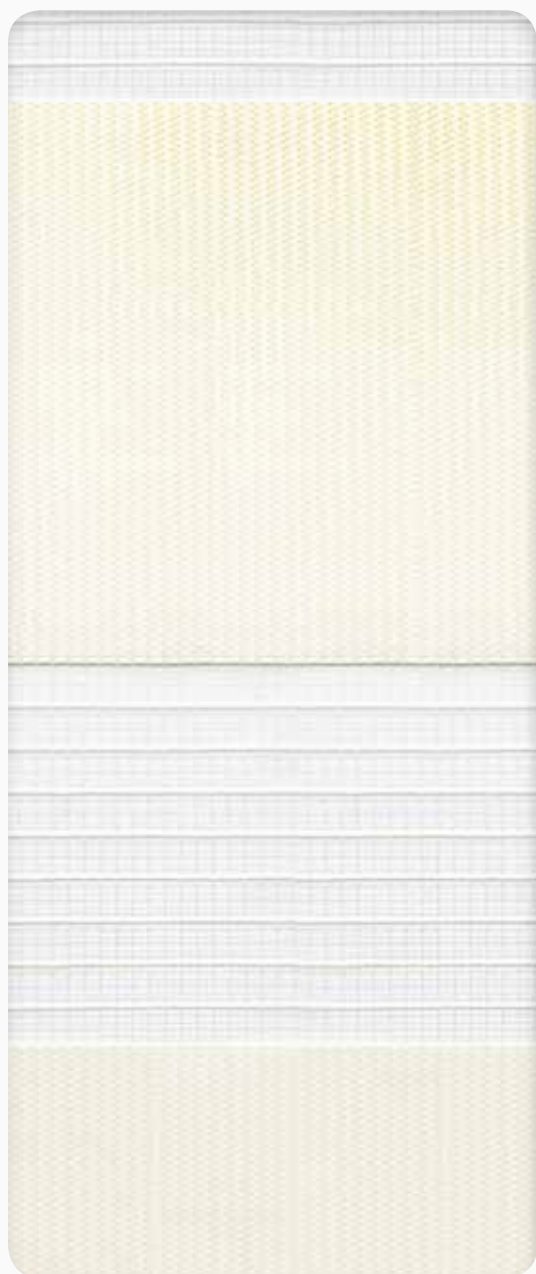

blanco
white
280 **12354916**



marfil
ivory
280 **12354113**



melocotón
peach
280 **12354134**



camel
camel
280 **12354119**



marrón
brown
280 **12354825**



rojo vino
red wine
280 **12354304**



rosa
pink
280 **12354315**



amarillo
yellow
280 **12354118**



oro
gold
280 **12354124**




verde
green
280 **12354618**



verde claro
light green
280 **12354619**



celeste
sky blue
280 **12354524**

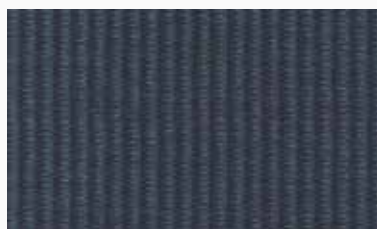

azul marino
navy blue
280 **12354509**




lila
lilac
280 **12354405**



gris
grey
280 **12354868**



gris oscuro
dark grey
280 **12354743**

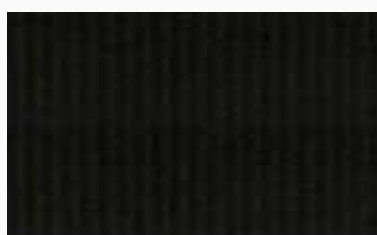

negro
black
280 **12354964**

Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecniche	Características técnicas	خصائص تقنية
Peso / Weight / Poids / Peso / وزن	112 g/m² ± 5 %				
Ancho / Width / Largeur Largura / Larghezza / عرض	280 cm				
Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة	0,34 mm ± 0,05				
Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	70 m ± 10 %				
Composición / Composition / Composition Composição / Composizione / التركيبة	100 % polyester				
Repetición de franjas Line recurrence Récurrence de ligne Recorrência de linha Repetizione di strisce تكرار الخط	Solidas / Solid / Solide Sólido / Solido / صلب Transp. / Sheer / Transp. Transp./ Trasp. / شفاف	75 mm 50 mm			
			Resistencia a la tensión Tensile strength Résistance à la traction Resistência à tração Resistenza alla trazione قوة الشد	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama	251 daN/5 cm 251 daN/5 cm DIN53354:1981
			Limpiar con un trapo húmedo / Wet wipe Nettoyer avec un chiffon humide / Limpe com um pano húmido التنظيف باستخدام قطعة قماش مبللة		
			Termosoldable / Thermal welding allowed / Thermoscellable Termoselável / Saldabile / قابل للحام		

STRIPES WOOD



marfil
ivory
280 **12355700**



fresno
ashtree
280 **12355951**




haya
beech
280 **12355952**




roble
oak
280 **12355953**



avellano
hazelnut
280 **12355954**

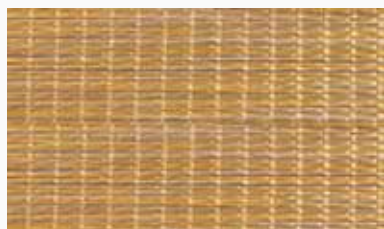

pino
pine
280 **12355956**

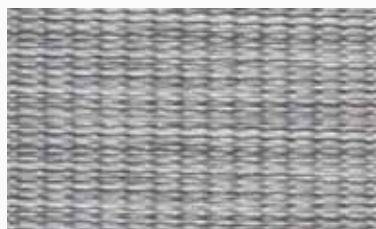

gris
grey
280 **12355957**




olivo
olive
280 **12355958**




castaño
chestnut
280 **12355959**

STRIPES WOOD

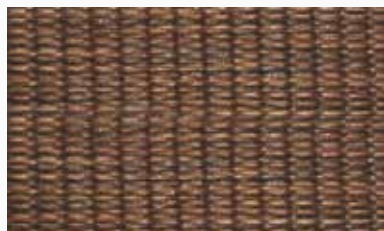

nogal
walnut
280 **12355960**

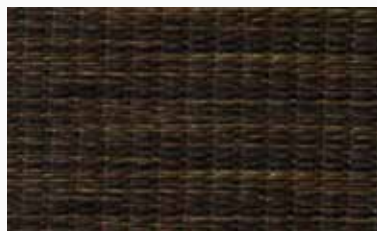


wengue
wengue
280 **12355961**



bambú
bamboo
280 **12355955**

Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecniche	Características técnicas	خصائص تقنية
Peso / Weight / Poids / Peso / وزن	140 g/m² ±5 %				
Ancho / Width / Largeur Largura / Larghezza / عرض	280 cm				
Espesor / Thickness / Épaisseur Espessura / Spessore / سماكة	0,45 mm ± 0,05				
Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	70 m ±10 %				
Composición / Composition / Composition Composição / Composizione / التركيبة	100 % polyester				
Repetición de franjas Line recurrence Récurrence de ligne Recorrência de linha Repetizione di strisce تكرار الخط	Solidas / Solid / Solide Sólido / Solido / صلب Transp. / Sheer / Transp. Transp./ Trasp. / شفاف	75 mm 50 mm			
			Resistencia a la tensión Tensile strength Résistance à la traction Resistência à tração Resistenza alla trazione قوة الشد	Urdimbre / Warp Chaîne / Urdidura Trama / Weft Trame / Trama	253 daN/5 cm 225 daN/5 cm DIN53354:1981
			Limpiar con un trapo húmedo / Wet wipe Nettoyer avec un chiffon humide / Limpe com um pano húmido Pullire con un panno umido / التنظيف باستخدام قطعة قماش مبللة		
			Termosoldable / Thermal welding allowed / Thermoscellable Termosellável / Saldabile / قابل للحام		

NEVAFLEX ALUM

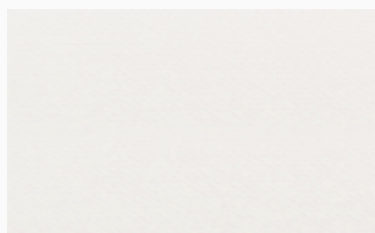

blanco
white
280 **12217900**



marfil
ivory
280 **12217938**




beige
beige
280 **12217113**



chocolate
chocolate
280 **12217814**





gris
grey
280 **12217867**

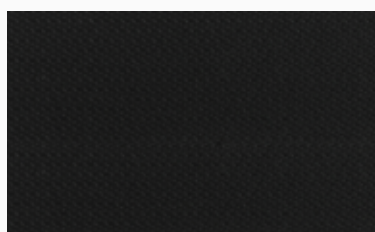


negro
black
280 **12217964**

Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecniche	Características técnicas	خصائص تقنية
Peso / Weight / Poids / Peso / وزن	140 g/m² ±5 %				
Ancho / Width / Largeur Largura / Larghezza / عرض	280 cm				
Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	30 m ±10 %				
Composición / Composition / Composition Composição / Composizione / التركيبة	100 % polyester				
		Repetición de franjas Line recurrence Récurrence de ligne Recorrência de linha Repetizione di strisce تكرار الخط	Solidas / Solid / Solide Sólido / Solido / صلب	75 mm	
			Transp. / Sheer / Transp. Transp. / Trasp. / شفاف	50 mm	
		Resistencia del color / Colour fastness Résistance de la couleur / Resistência da cor Resistenza del colore / ثبات اللون		7-8	


NEVAFLEX BLACKOUT PLAIN

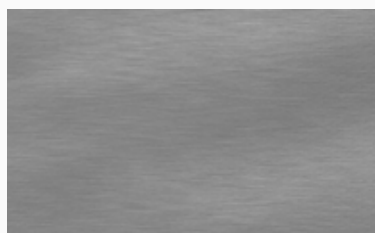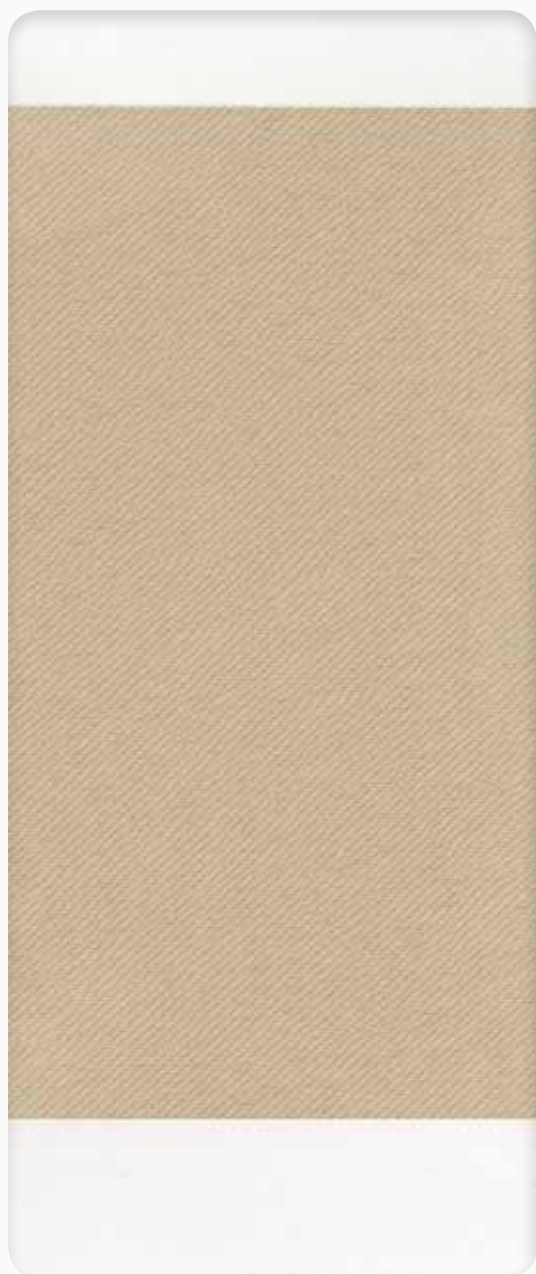

blanco
white
280 **12294900**

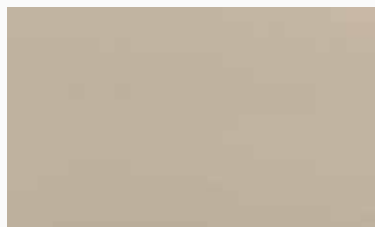

beige
beige
280 **12294113**

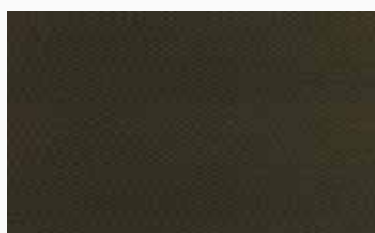


bronce
bronze
280 **12294715**



chocolate
chocolate
280 **12294814**

■ Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecniche	Características técnicas	خصائص تقنية
 Peso / Weight / Poids / Peso / وزن	163 g/m² ±5 %				
 Ancho / Width / Largeur Largura / Larghezza / عرض	280 cm				
 Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	30 m ±10 %				
 Composición / Composition / Composition Composição / Composizione / التركيبة	100 % polyester				
		 Repetición de franjas Line recurrence Récurrence de ligne Recorrência de linha Repetizione di strisce تكرار الخط	Solidas / Solid / Solide Sólido / Solido / صلب	133 mm	
			Transp. / Sheer / Transp. Transp./ Trasp. / شفاف	98 mm	
		 Opacidad / Opacity / Opacité Opacidade / Opacità / غموض		100 %	
		 Resistencia del color / Colour fastness Résistance de la couleur / Resistência da cor Resistenza del colore / ثبات اللون		7-8	

NEVAFLEX BLACKOUT MADERA

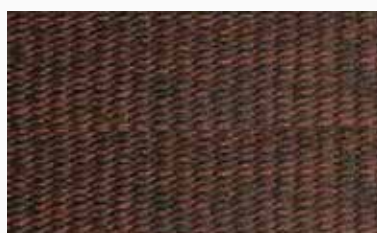madera clara
light wood280 **12295010**pino
pine280 **12295030**madera oscura
dark wood280 **12295020**

■ Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecniche	Características técnicas	خصائص تقنية
 Peso / Weight / Poids / Peso / وزن	227 g/m² ±5 %				
 Ancho / Width / Largeur Largura / Larghezza / عرض	280 cm				
 Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	25 m ±10 %				
 Composición / Composition / Composition Composição / Composizione / التركيبة	100 % polyester				
		 Repetición de franjas Line recurrence Récurrence de ligne Recorrência de linha Repetizione di strisce تكرار الخط	Solidas / Solid / Solide Sólido / Solido / صلب	100 mm	
			Transp. / Sheer / Transp. Transp./ Trasp. / شفاف	60 mm	
		 Opacidad / Opacity / Opacité Opacidade / Opacità / غموض		100 %	
		 Resistencia del color / Colour fastness Résistance de la couleur / Resistência da cor Resistenza del colore / ثبات اللون		7-8	



VENTEX



blanco
white
300 **12289900**



crema
cream
300 **12289115**



chocolate
chocolate
300 **12289814**




beige
beige
300 **12289938**




gris
grey
300 **12289867**

■ Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecniche	Características técnicas	خصائص تقنية
	Peso / Weight / Poids / Peso / وزن	195 g/m² ±5 %			
	Ancho / Width / Largeur Largura / Larghezza / عرض	300 cm			
	Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	35 m ±5 %			
	Composición / Composition / Composition Composição / Composizione / التركيبة	100 % polyester			
	Resistencia a la luz / Light fastness Résistance à la lumière / Resistência à luz Resistenza alla luce / مقاومة الضوء	AATCC 16-2003 Class 4.5 After 80 AFU			
				Resistente al fuego / Fire resistance Résistance au feu / Resistência ao fogo Resistente al fuoco / مقاوم النار	
				Repetición de franjas Line recurrence Récurrence de ligne Recorrência de linha Repetizione di strisce تكرار الخط	Transp. / Sheer / Transp. Transp. / Trasp. / شفاف 50 mm
				Imprimible / Printable / Imprimable Imprimível / Stampabile	HP Latex printer tested front face only

VENTEX WOOD

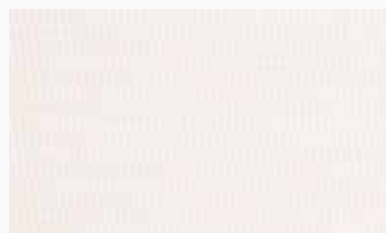

blanco
white
300 **12221900**

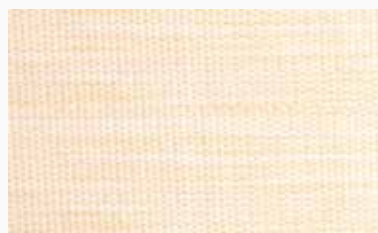

marfil
ivory
300 **12221938**



beige
beige
300 **12221113**



madera clara
light wood
300 **12221010**



pino
pine
300 **12221030**



madera oscura
dark wood
300 **12221020**

■ Características técnicas	Technical characteristic	Caractéristiques technique	Caratteristiche tecniche	Características técnicas	خصائص تقنية
	Peso / Weight / Poids / Peso / وزن	207 g/m ² ±5 %			
	Ancho / Width / Largeur Largura / Larghezza / عرض	300 cm			
	Largo del rollo / Roll length / Longueur du rouleau Comprimento do rolo / Lunghezza del rotolo / طول اللفة	30 m ±5 %			
	Composición / Composition / Composition Composição / Composizione / التركيبة	100 % polyester			
				Resistencia del color / Colour fastness Résistance de la couleur / Resistência da cor Resistenza del colore / ثبات اللون	7-8 Escala de azules Scale of blue
				Repetición de franjas Line recurrence Récurrence de ligne Recorrência de linha Repetizione di strisce تكرار الخط	Transp. / Sheer / Transp. Transp. / Trasp. / شفاف 55 mm

COLECCIONES COLLECTIONS

TEJIDOS • FABRICS

Colecciones de tejido para enrollable: colores y características técnicas
Fabric collections for roller blinds: colours and technical data

